

Mate^{Veil} series

Double Glass BiFacial N-Type TOPCon Solar Module

570~595Watt

Model: UL-***M-144ADGN

Maximum Efficiency: **23.03%**



Bifacial Mono Module

Capable of generating power at back side,
80±5% efficiency of the front side



Longer Term Reliability

Passed the IEC63209-1:2021 standard test
(With testing standards 2 to 3 times stricter than regular IEC requirements)



Outstanding Mechanical load Resistance

2400 Pa wind load, 5400 Pa snow load



Anti-PID(potential induced degradation)

Passed anti-PID test under 85°C damp heat 85%
relative humidity for 192 hours





Lower LCOE

Lower shading and resistive loss Lower temperature coefficient



Widely Applied To Various Scenarios

Flexibly applied to roofs, ground surfaces, water surfaces, mountainous
areas, and other diverse environments

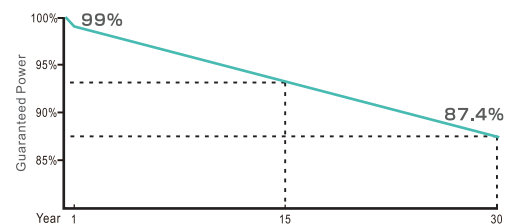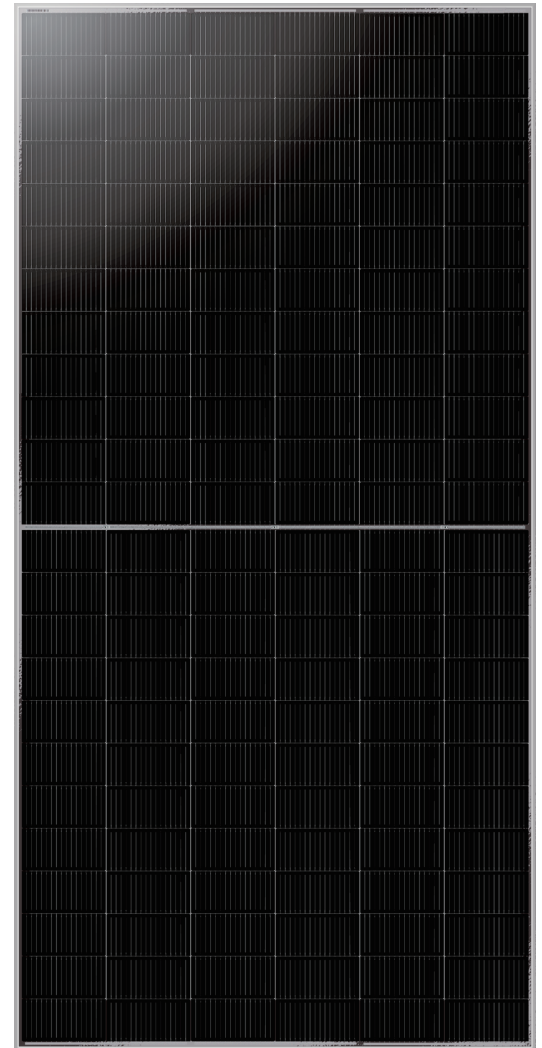

15 Year Product Warranty **1%** Power Degradation In The First Year

30 Year Linear Power Warranty **0.4%** Linear Power Degradation



CEC Listed



IEC 61215, IEC 61730

ISO 9001: 2015(Quality management systems)

ISO 14001: 2015 (Environmental management systems)

ISO45001: 2018 (Occupational health and safety)

UNI 9177 la CLASSE DI REAZIONE AL FUOCO:1



Ulica Official Website

Add: No.238 Yunlin Middle Road, Ningbo China

TEL: +86-574-28828999

Email: sales@ulsolar.com.cn

DOUBLE GLASS BIFACIAL 570~595Watt



ELECTRICAL SPECIFICATIONS

Module Type	UL-570M-144ADGN			UL-575M-144ADGN			UL-580M-144ADGN			UL-585M-144ADGN			UL-590M-144ADGN			UL-595M-144ADGN		
	STC*	NOCT*		STC*	NOCT*		STC*	NOCT*		STC*	NOCT*		STC*	NOCT*		STC*	NOCT*	
Maximum Power(Pmax)	W	570	432	575	436		580	440		585	443		590	447		595	451	
Maximum Power Voltage(Vmp)	V	43.70	40.20	43.85	40.34		44.02	40.50		44.17	40.64		44.35	40.80		44.55	40.99	
Maximum Power Current(Imp)	A	13.04	10.74	13.11	10.80		13.18	10.85		13.24	10.91		13.30	10.96		13.36	11.00	
Open-circuit Current(Voc)	V	52.12	47.43	52.32	47.61		52.52	47.79		52.72	47.98		52.82	48.07		52.92	48.16	
Short-circuit Current(Isc)	A	13.83	11.16	13.89	11.20		13.95	11.25		14.01	11.30		14.02	11.31		14.06	11.34	
Module Efficiency STC	%	22.07		22.26			22.45			22.65			22.84			23.03		

*STC:Cell temperature:25°C,Irradiance:1000W/m²,Ari mass:1.5G,Power measurement tolerance: ±3%

*NOCT:Air temperature:20°C,Irradiance:1000W/m²,Ari mass:1.5G,Wind speed:1m/s

OPERATING PARAMETERS

Operating Temperature -40°C~85°C

Maximum system voltage DC1500V(IEC)

Maximum series fuse rating 30A

Nominal operating cell temperature 43±2°C

Power tolerance 0~+5Watt

TEMPERATURE RATINGS



Temperature coefficients of Pmax -0.29%/°C

Temperature coefficients of Voc -0.25%/°C

Temperature coefficients of Isc 0.046%/°C

I-V CURVE

I-V characteristics at different irradiances (reference to 580 W)



REAR SIDE POWER GAIN(REFERENCE TO 580W FRONT SIDE)

Pmax/W	580	609	638	667	696	725	754
Pmax gain	0%	5%	10%	15%	20%	25%	30%
Voc/V	52.52	52.52	52.53	52.52	52.52	52.52	52.52
Isc/A	13.95	14.65	15.35	16.04	16.74	17.44	18.14
Vmp/V	44.02	44.02	44.02	44.02	44.02	44.02	44.02
Imp/A	13.18	13.83	14.49	15.15	15.81	16.47	17.13

SPECIFICATIONS

Cell Type	N-type TOPCon Mono Half Cell					
No.of cells	144(6×12×2)					
Dimensions	2278*1134*30mm					
Weight	30.3kg					
Front Glass	2.0mm,Anti-Reflection Coating,High Transmission,Low Iron,Tempered Glass					
Back Glass	2.0mm,High Transmission,Low Iron,Tempered Glass					
Frame	Anodized Aluminium Alloy					
Junction Box	IP68,3diodes					
Connector	MC4 Compatible:PV-UL608 or Original:MC4-EVO2 or others					

Cable Length (Including Connector) 4mm²
Short Cable: (+)400/(-)200mm or Long Cable:(+)1400/(-)1400mm
or Customized Length

PACKAGING INFORMATION



36 Pcs/Pallet



72 Pcs/Stack



Length:2295mm



Width:1130mm




Height:2540mm



Weight:2262kg/Stack



10 Stack/40HQ
720Pcs/40HQ

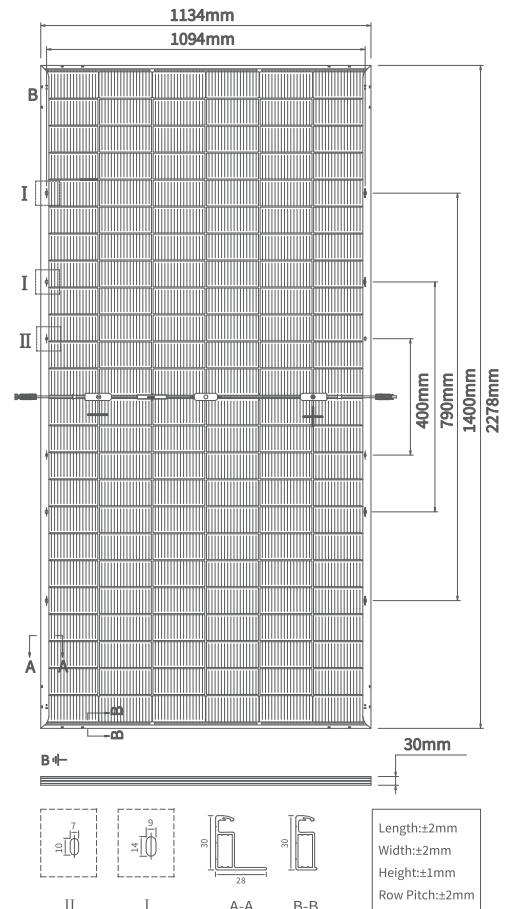

Specifications included in this datasheet are subject to change without notice.

Ulica Solar reserves the right of final interpretation.

Version number: UL-2278-144ADGNYB-30-EN-V3.0